

## RONDA startech – Movement Cal. 5040.E & 5040.D

## User's Manual English

You have decided to buy a watch, which was assembled by a watchmaker using a Ronda movement. Please note that no watches are produced or distributed under the Ronda brand.

In case of repairs, guarantee claims and questions concerning the functioning of a watch, purchasers and consumers should contact their retailer or the watch manufacturer, for which the relevant information can be found in the sales or guarantee documentation provided with the watch.






•

B


в

03



- Pull out the crown to position II (the watch continues to run).
- Iurn the crown until the correct date appears.
- Push the crown back into position I.

Please note The date can be changed during the date changing phase between approx. 9:00 PM and 12:00 PM, please note that the date mu be set to the date of the following day as in this case the automatic date changing does be set to the date of th this case the automati not occur at midnight.




B



Turn the rown until yesterday's date appears 22.

- S\* Pull out the crown to position III (the watch stops).
- Turn the rown until the correct date 23 and weekday TH appears.
- \*Continue to turn the crown, until the correct time 8:35 PM appears.
- 8 Push the crown back into position I.

ase note To set your watch to the exact second, please refer to the chapter entitled «setting the time». Please observe the AM/PM clock rhythm

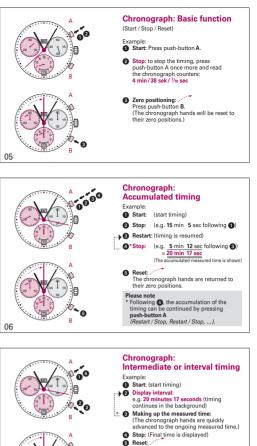

в 07

Adjusting the chronograph hands to zero position Example: One or several chronograph hands are not in their correct zero positions and have to be adjusted (e.g. following a battery change). B


> ₿

Pull out the crown to position III (all chronograph hands are in their correct or incorrect zero position).

Reset: The chronograph hands are returned to their zero position

Please note \* Following (), further intervals or inter-mediates can be displayed by pressing push-button B (display interval / make up measured time, ...).

Keep push-buttons A and B depressed simultaneously for at least 2 seconds (the second counter hand rotates by 360° → corrective mode is activated).



CE

08